


# ROOFING FASTENERS SELECTION GUIDE


Bremick Roofing screws incorporate proprietary design features, developed to enhance optimum performance and service life.

2021


# CORRUGATED SHEETING PROFILE



TO TIMBER

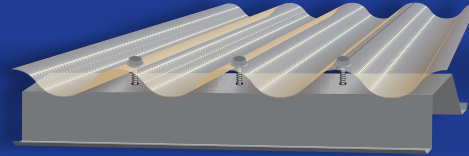

TO TOPHAT

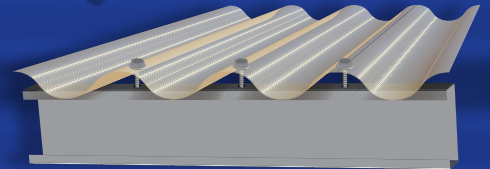

TO PURLIN

## ROOFING CREST FIXED



### Vortex™ ROOF universal screw

6.2-13x50 Hex Class 4 (B8) Top Grip™  
Fixing to softwood or metal battens up to 1.5mm.  
SUHT8620501



### Vortex™ ROOF universal screw

6.2-13x50 Hex Class 4 (B8) Top Grip™  
Fixing to metal battens up to 1.5mm or softwood.  
SUHT8620501



### SDM ROOF

12-14x39 Hex Class 4 (B8) Top Grip™  
Fixing to purlin from 1.0-5.5mm.  
SMHT8120351



### Type 17 ROOF

12g x 50mm Hex Type 17 (B8) Top Grip™  
Fixing to softwood or hardwood.  
STHT8120501



NOT SUITABLE  
FIXING  
HARDWOOD



### Vortex™ ROOF universal screw

6.2-13x65 Hex Class 4 (B8) Top Grip™  
Fixing to metal battens up to 1.5mm or softwood.  
SUHT8620651

## WALLING VALLEY FIXED



### Vortex™ CLAD universal screw

6.2-13x25 Hex Class 4 (B8) SEAL  
Fixing to metal batten up to 1.5mm or softwood.  
SUHC8620251



### Vortex™ CLAD universal screw

6.2-13x25 Hex Class 4 (B8) SEAL  
Fixing to metal batten up to 1.5mm or softwood.  
SUHC8620251



### SDM CLAD

10-16x16 Hex Class 4 (B8) Seal  
Fixing to purlins from 1.0-4.5mm.  
SMHC8100161



### Vortex™ CLAD universal screw

5.4-13x25 Hex Class 4 (B8) SEAL  
Fixing to metal batten up to 1.5mm or softwood.  
SUHC8540251



### Vortex™ CLAD universal screw


5.4-13x25 Hex Class 4 (B8) SEAL  
Fixing to metal batten up to 1.5mm or softwood.  
SUHC8540251




### SDM CLAD

10-16x25 Hex Class 4 (B8) Seal  
Fixing to purlins from 1.0-4.5mm.  
SMHC8100251


# SQUARE RIB SHEETING PROFILE

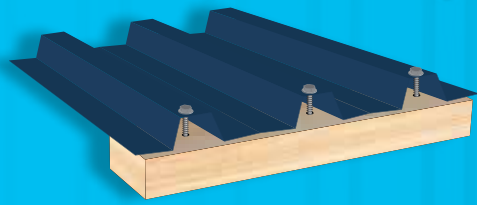

TO TIMBER

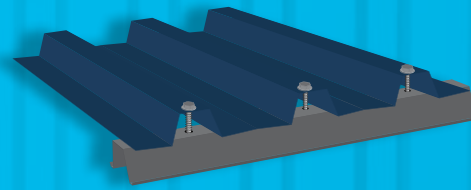

TO TOPHAT

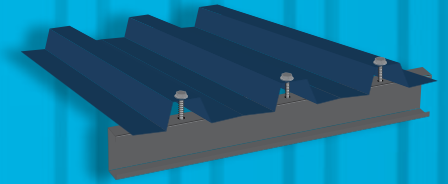

TO PURLIN



NOT SUITABLE  
FIXING  
HARDWOOD



## Vortex™ ROOF universal screw

6.2-13x65 Hex Class 4 (B8) Top Grip™  
Fixing to metal battens up to 1.5mm or softwood.  
SUHT8620651



## Vortex™ ROOF universal screw

6.2-13x50 Hex Class 4 (B8) Top Grip™  
Fixing to metal battens up to 1.5mm or softwood.  
SUHT8620501



## SDM ROOF

12-14x51 Hex Class 4 (B8) Top Grip™  
Fixing to purlin from 1.0-5.5mm thick.  
SMHT8120451



## Type 17 ROOF

12g x 65mm Type 17 (B8) Top Grip™  
Fixing to softwood or hardwood.  
STHT8120651



NOT SUITABLE  
FIXING  
HARDWOOD




## Vortex™ ROOF universal screw

6.2-13x65 Hex Class 4 (B8) Top Grip™  
Fixing to metal battens up to 1.5mm or softwood.  
SUHT8620651



## Vortex™ CLAD universal screw

6.2-13x25 Hex Class 4 (B8) SEAL  
Fixing to metal batten up to 1.5mm or softwood.  
SUHC8620251



## Vortex™ CLAD universal screw

6.2-13x25 Hex Class 4 (B8) SEAL  
Fixing to metal battens up to 1.5mm or softwood.  
SUHC8620251



## SDM CLAD

10-16x16 Hex Class 4 (B8) Seal  
Fixing to purlins from 1.0-4.5mm thick.  
SMHC8100161



## Type 17 CLAD

12-11x25 Hex Class 4 (B8) Seal  
Fixing Square Rib Profiles to softwood or hardwood.  
STHC8120251



## Vortex™ CLAD universal screw

5.4-13x25 Hex Class 4 (B8) SEAL  
Fixing Corri to metal battens up to 1.5mm or softwood.  
SUHC8540251



## SDM CLAD

10-16x25 Hex Class 4 (B8) Seal  
Fixing Square Rib Roofing Profiles to purlins  
from 1.0-4.5mm thick. SMHC8100251

# ROOFING CREST FIXED



# WALLING VALLEY FIXED




# CYCLONIC ROOFING — CORRUGATED SHEETING PROFILE

## CORRUGATED ROOF WITH SEAL

## CORRUGATED ROOF PROFILED PLATE

## CORRUGATED ROOF BRA



TO TIMBER



**Hex Head Type 17**  
14g x 50mm Hex (B8) Seal  
Fixing to softwood or hardwood in high wind areas.  
STHC8140501



**Region D Type 17**  
14-10x50 Hex  
Fixing to softwood or hardwood  
in high wind areas.  
STHC814050R



**BRA Type 17**  
14-10 x 50 Hex  
Fixing to softwood and hardwood in high wind  
areas.  
STHC814050D




**Hex Head Type 17**  
14g x 65mm Hex (B8) Seal  
Fixing to softwood or hardwood in high wind areas.  
STHC8140651



**Region D Type 17**  
14g x 65mm Hex  
Fixing to softwood or hardwood in high  
wind areas. STHC814065R



**BRA Type 17**  
14g x 65mm Hex BRA  
Fixing to softwood and hardwood in high wind  
areas. STHC814065D

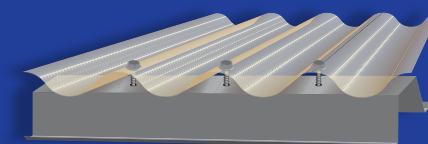

TO TOPHAT



**Vortex™ ROOF universal screw**  
6.2-13 x 50 Hex Class 4 (B8) Top Grip™  
Fixing to metal battens up to 1.5mm or softwood  
in high wind areas.  
SUHT8620501



**Region D Vortex**  
6.2-13 x 55 Hex  
Fixing to softwood and metal  
battens up to 1.5mm in high wind areas.  
SUHC862055R




**BRA Vortex**  
6.2-13 x 55 Hex  
Fixing to softwood and metal battens up to 1.5mm  
in high wind areas.  
SUHC862055D

# CYCLONIC ROOFING – CORRUGATED SHEETING PROFILE

## CORRUGATED ROOF WITH SEAL

## CORRUGATED ROOF PROFILED PLATE

## CORRUGATED ROOF BRA

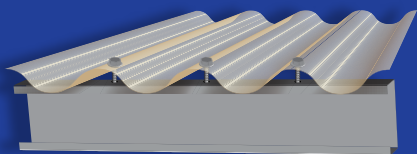

TO PURLIN



### Hex Head SDM

14g x 55mm Hex (B8) Seal  
Fixing to purlin from 1.0-5.5mm in high wind areas.  
SMHC8140501



### Region D SDM

14-10 x 55 Hex  
Fixing to purlin from 1.0-5.5mm in high wind areas.  
SMHC814055R




### SDM BRA

14 x 55mm Hex Class 4 (B8) BRA  
Fixing to purlin from 1.0-5.5mm in high wind areas.  
SMHC814050D



### Hex Head SDM

14g x 65mm Hex (B8) Seal  
Fixing to purlin from 1.0-5.5mm in high wind areas.  
SMHC8140651

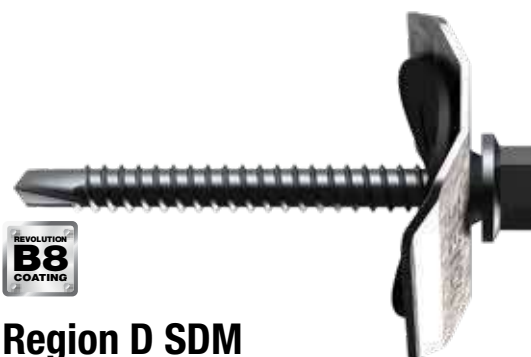

### Region D SDM

14g x 65mm Hex  
Fixing to purlin from 1.0-5.5mm in high wind areas.  
SMHC814065R



### SDM BRA

14g x 65mm Hex  
Fixing to purlin from 1.0-5.5mm in high wind areas.  
SMHC814065D

# CYCLONIC ROOFING – SQUARE RIB SHEETING PROFILE

## SQUARE RIB ROOF WITH SEAL

## SQUARE RIB ROOF PROFILED PLATE

## SQUARE RIB ROOF BRA



**Hex Head Type 17**  
14g x 65mm Hex (B8) Seal  
Fixing to softwood or hardwood in high wind areas.  
STHC8140651



**Region D Type 17**  
14g x 65mm Hex  
Fixing to softwood or hardwood in high wind areas.  
STHC814065R



**BRA Type 17**  
14g x 65mm Hex BRA  
Fixing to softwood or hardwood in high wind areas.  
STHC814065D



**Vortex™ ROOF universal screw**  
6.2-13 x 65 Hex Class 4 (B8) Top Grip™  
Fixing to metal battens up to 1.5mm or softwood.  
SUHT8620651



**Region D Vortex**  
6.2-13 x 65 Hex  
Fixing to softwood and metal battens up to 1.5mm  
in high wind areas.  
SUHC862065R



**BRA Vortex**  
6.2-13 x 65 Hex  
Fixing to softwood and metal battens up to  
1.5mm in high wind areas.  
SUHC862065D

# CYCLONIC ROOFING – SQUARE RIB SHEETING PROFILE

## SQUARE RIB ROOF WITH SEAL

## SQUARE RIB ROOF PROFILED PLATE

## SQUARE RIB ROOF BRA



### Hex Head SDM

14g x 55mm Hex (B8) Seal  
Fixing to purlin from 1.0-5.5mm in high wind areas.

SMHC8140501



### Region D SDM

14-10 x 55 Hex  
Fixing to purlin from 1.0-5.5mm in high wind areas.


SMHC814055R



### SDM BRA

14 x55mm Hex Class 4 (B8) BRA  
Fixing to purlin from 1.0-5.5mm in high wind areas.

SMHC814050D

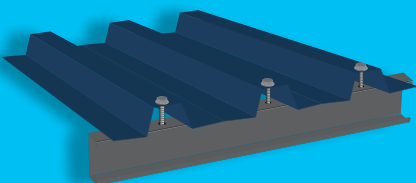

TO PURLIN



### Hex Head SDM

14g x 65mm Hex (B8) Seal  
Fixing to purlin from 1.0-5.5mm in high wind areas.

SMHC8140651



### Region D SDM

14g x 65mm Hex  
Fixing to purlin from 1.0-5.5mm in high wind areas.

SMHC814065R




### SDM BRA


14g x 65mm Hex  
Fixing to purlin from 1.0-5.5mm in high wind areas.

SMHC814065D


# CYCLONIC WALLING – CORRUGATED PROFILE



TO TIMBER

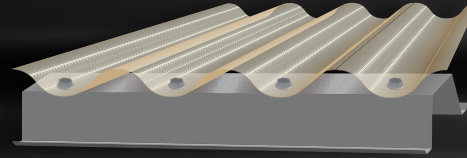

TO TOPHAT

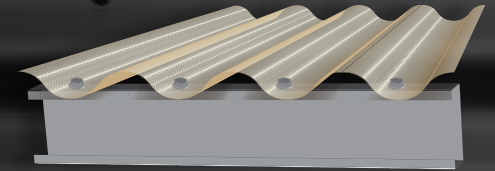

TO PURLIN

## WALLING VALLEY FIXED



### Type 17 Hex Head

14 x 25 Hex Class 4 (B8) SEAL

Fixing to metal batten up to 1.5mm or softwood.

STHC8140251



### Vortex™ CLAD universal screw

6.2-13 x 25 Hex Class 4 (B8) SEAL

Fixing to metal batten up to 1.5mm or softwood.

SUHC8620251



### SDM


14 x 25 Hex Class 4 (B8) Seal

Fixing to purlins from 1.0-5.5mm.


SMHC8140251




# CYCLONIC WALLING – SQUARE RIB PROFILE

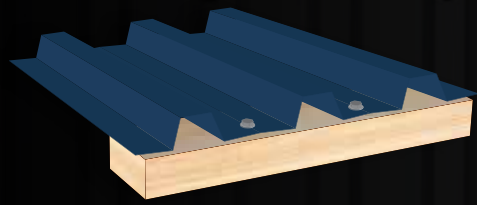

TO TIMBER

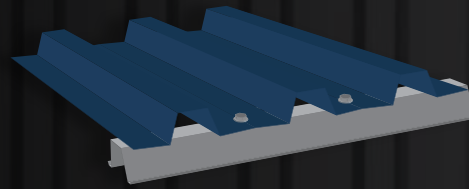

TO TOPHAT

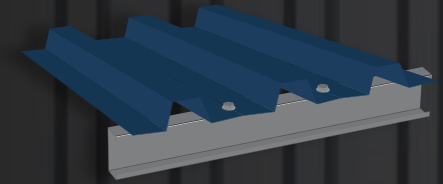

TO PURLIN

# WALLING VALLEY FIXED



## Type 17 Hex Head

14 x 25 Hex Class 4 (B8) SEAL

Fixing to metal batten up to 1.5mm or softwood.

STHC8140251



## Vortex™ CLAD universal screw

6.2-13 x 25 Hex Class 4 (B8) SEAL

Fixing to metal batten up to 1.5mm or softwood.

SUHC8620251



## SDM

14 x 25 Hex Class 4 (B8) Seal

Fixing to purlins from 1.0-5.5mm.







SMHC8140251

# ROOFING FASTENERS COLORBOND® COLOURS

Dover White™	Surfmist™	Evening Haze/ Summershade®	Classic Cream™	Paperbark™
<b>DW</b>	<b>SM</b>	<b>SS</b>	<b>CC</b>	<b>PA</b>
Dune™	Southerly®	Shale Grey™	Bluegum®	Windspray™
<b>DU</b>	<b>SO</b>	<b>SH</b>	<b>BM</b>	<b>WS</b>
Gully™	Jasper™	Wallaby™	Basalt®	Woodland Grey™
<b>GY</b>	<b>JA</b>	<b>WA</b>	<b>BZ</b>	<b>WG</b>
Monument™	Night Sky™	Ironstone™	Deep Ocean™	Cottage Green™
<b>MO</b>	<b>NS</b>	<b>IS</b>	<b>DO</b>	<b>CO</b>
Pale Eucalypt™	Manor Red™			
<b>PE</b>	<b>MN</b>			

# BREMICK CORROSION PROTECTION WARRANTY AUSTRALIA

September 2017

ENVIRONMENTAL CONDITIONS	WARRANTY PERIOD		
	ARMOURCOAT™ 3 AS 3566 Class 3	ARMOURCOAT™ 4 AS 3566 Class 4	REVOLUTION B8 AS 3566 Class 4
 <b>MILD URBAN/RURAL (ISO 9223 CATEGORY 2)</b> Most areas of Australia & NZ beyond 50km from the sea but can be as close as 1km from seas that are relatively sheltered.	<b>10 YEARS</b>	<b>20 YEARS</b>	<b>30 YEARS</b>
 <b>MILD/MODERATE MARINE, MODERATE INDUSTRIAL (ISO 9223 CATEGORY 3)</b> Coastal areas with low salinity, urban and industrial areas with low pollution, varies significantly with factors such as winds, topography and vegetation.	<b>10 YEARS</b>	<b>20 YEARS</b>	<b>25 YEARS</b>
 <b>SEVERE MARINE (ISO 9223 CATEGORY 4)</b> Occurs mainly on the coast in areas with rough seas and surf it extends from several hundred metres to 1km inland.	<b>NOT RECOMMENDED</b>	<b>15 YEARS</b>	<b>20 YEARS</b>
 <b>VERY SEVERE INDUSTRIAL (ISO 9223 CATEGORY 5*)</b> Aggressive industrial areas.	<b>NOT RECOMMENDED</b>	<b>NOT RECOMMENDED</b>	<b>15 YEARS</b>
 <b>VERY SEVERE MARINE (ISO 9223 CATEGORY 5*)</b> Typically C5 zones start from around 150m from breaking surf and extend several hundred metres inland. C5 zones are characterised by salt in the air but not impacted by salt spray/mist.	<b>NOT RECOMMENDED</b>	<b>NOT RECOMMENDED</b>	<b>10 YEARS</b>
 <b>EXTREME MARINE (ISO 9223 CATEGORY CX)</b> Typically CX zones start from breaking surf and extend several hundred metres inland. CX zones are characterised by salt in the air and impacted by salt spray/mist.	<b>NOT RECOMMENDED</b>	<b>NOT RECOMMENDED</b>	<b>NOT RECOMMENDED</b>

Due to changes in the Consumer Warranty Laws, Bremick has aligned the warranty period for its products to be consistent with the warranty period of the major roofing material suppliers. AS3566.2 Outdoor Exposure testing results indicate the lifespan of our products to extend beyond the warranty period.

Assessment of environmental conditions to be in accordance with ISO 9223  
 \*ISO 9223 Category CX (Extreme) are characterised by salt spray. Typically CX zones are from breaking surf and extend approximately 150m inland. When building in Category CX please consult your local Bremick representative for further advice on warranties and the most suitable fastener for the application.

**FOR MORE INFORMATION CALL +61 (0)2 8332 1501**

**BREMICK™**





# REVOLUTIONARY PROTECTION & DRILLING PERFORMANCE



## 2X

### PROTECTION

MORE THAN DOUBLE the Corrosion protection of conventional Class 4 in category 5 environments.

## 8X

### TOUGHER

Than conventional Class 4 Extremely abrasion resistant. Minimal coating loss during installation.

## 30%

### FASTER DRILLING

Than conventional Class 4

#### CORROSION PROTECTION

More than double the Corrosion protection of conventional Class 4. Suitable for Very Severe corrosive environments (ISO 9223 Category 5).

#### WARRANTY

Fully warranted for ISO Category 5 Very Severe Environments.

#### DRILL DRIVE PERFORMANCE

30% Faster than conventional Class 4.

#### DURABILITY

Eight times tougher than conventional Class 4. Extremely abrasion resistant. Minimal coating loss during installation.

#### APPEARANCE

Smoother, finer & matched to ZINCALUME®.

#### CONFORMANCE

Exceeds AS 3566 Class 4.

#### COMPATIBILITY

COLORBOND® Steel & Ultra Steel, ZINCALUME®, Steel, Galvanized & Zinc coated products, ACQ & treated timber.



# CONTACTS

## SYDNEY

Warehouse 4B  
3 Melito Court  
Prestons NSW 2170  
p: 02 8332 1500  
f: 02 9690 1474

## NEWCASTLE

Unit 5  
20 Templar Place  
Bennetts Green NSW 2290  
p: 02 4948 0504

## BRISBANE

430 Sherbrooke Road  
Willawong QLD 4110  
p: 07 3273 9700  
f: 07 3041 4720

## TOWNSVILLE

Unit 1  
34 Auscan Cres  
Garbutt North QLD 4814  
p: 07 4729 4900  
f: 07 5636 0211

## ADELAIDE

78 Pym St  
Dudley Park SA 5008  
p: 08 8344 5967  
f: 08 8359 1611

## MELBOURNE

30 Jayco Drive  
Dandenong South VIC 3175  
p: 03 8710 7400  
f: 03 8632 2750

## PERTH

119 Motivation Dr  
Wangara WA 6065  
p: 08 9302 5255  
f: 08 9303 4820

## DARWIN

Unit 3  
60 Albatross Street  
Winnellie NT 0820  
p: 08 8997 5800  
f: 08 8180 1713

## AUCKLAND

## AUCKLAND

Unit F  
373 Neilson Street  
Penrose Auckland 1061  
p: +64 (09) 525 2244  
Toll Free: 0800 658 075  
f: +64 (09) 525 1952

## CHRISTCHURCH

398B Halswell Junction Rd  
Hornby South Christchurch 8024  
p: +64 (03) 365 8998  
Toll Free: 0800 106 670  
f: +64 (03) 365 8538

### DISCLAIMER, WARRANTIES AND LIMITATION OF LIABILITY

This publication is intended to be an aid for all trades and distributors involved with the installing or distributing of Bremick products.

Except to the extent to which liability may not lawfully be excluded or limited, Bremick Pty Ltd will not be under or incur any liability to you for any direct or indirect loss or damage however caused, which you may suffer or incur in connection with this publication.

Bremick advises that the relevant Roofing and Cladding sheeting manufacturers design and installation manuals be adhered to and a suitable product form our range be selected.