


ROOFING FASTENERS SELECTION GUIDE


Bremick Roofing screws incorporate proprietary design features, developed to enhance optimum performance and service life.

2023


CORRUGATED SHEETING PROFILE



TO TIMBER




TO TOPHAT




TO PURLIN


SQUARE RIB SHEETING PROFILE

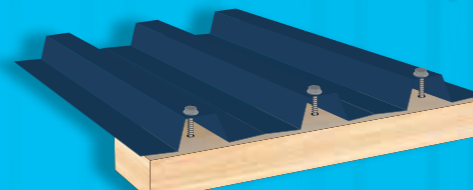

TO TIMBER

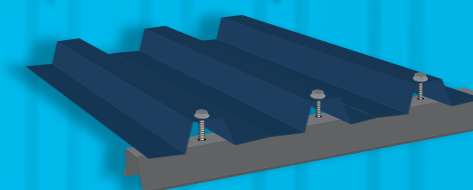

TO TOPHAT

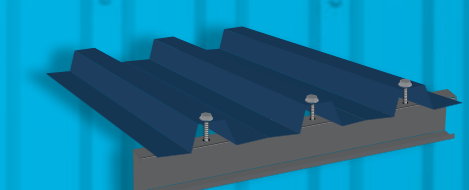

TO PURLIN

ROOFING CREST FIXED



vortex-PLUS



Vortex™ ROOF universal screw
6.2-13x50 Hex B8 (Cat 5) Top Grip™
Fixing to softwood or metal battens up to 1.5mm.
SVROXT86205011

vortex-PLUS



Vortex™ ROOF universal screw
6.2-13x50 Hex B8 (Cat 5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SVROXT86205011



SDM ROOF
12-14x39 Hex B8 (Cat 5) Top Grip™
Fixing to purlin from 1.0-5.5mm.
SMHT8120351

ROOFING CREST FIXED



vortex-PLUS



Vortex™ ROOF universal screw
6.2-13x65 Hex B8 (Cat 5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SVROXT86206511

vortex-PLUS



Vortex™ ROOF universal screw
6.2-13x50 Hex B8 (Cat 5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SVROXT86205011



SDM ROOF
12-14x51 Hex B8 (Cat 5) Top Grip™
Fixing to purlin from 1.0-5.5mm thick.
SMHT8120451



Type 17 ROOF
12g x 50mm Hex Type 17 B8 (Cat 5)
Top Grip™ - Fixing to softwood or hardwood.
STHT8120501



Vortex™ ROOF universal screw
6.2-13x65 Hex B8 (Cat 5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SVROXT86206511



Type 17 ROOF
12g x 65mm Type 17 B8 (Cat 5) Top Grip™
Fixing to softwood or hardwood.
STHT8120651



Vortex™ ROOF universal screw
6.2-13x65 Hex B8 (Cat 5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SVROXT86206511

WALLING VALLEY FIXED



Vortex™ CLAD universal screw
6.2-13x25 Hex B8 (Cat 5) SEAL
Fixing to metal batten up to 1.5mm or softwood.
SUHC8620251



Vortex™ CLAD universal screw
6.2-13x25 Hex B8 (Cat 5) SEAL
Fixing to metal batten up to 1.5mm or softwood.
SUHC8620251



SDM CLAD
10-16x16 Hex B8 (Cat 5) SEAL
Fixing to purlins from 1.0-4.5mm.
SMHC8100161

WALLING VALLEY FIXED



Vortex™ Valley Fix universal screw
4.8-13x25 Hex B8 (Cat 5) SEAL
Fixing to metal batten up to 1.5mm or softwood.
SUHC8480251



Vortex™ Valley Fix universal screw
4.8-13x25 Hex B8 (Cat 5) SEAL
Fixing to metal batten up to 1.5mm or softwood.
SUHC8480251



SDM CLAD
10-16x25 Hex B8 (Cat 5) SEAL
Fixing to purlins from 1.0-4.5mm.
SMHC8100251



Vortex™ CLAD universal screw
6.2-13x25 Hex B8 (Cat 5) SEAL
Fixing to metal batten up to 1.5mm or softwood.
SUHC8620251



Vortex™ CLAD universal screw
6.2-13x25 Hex B8 (Cat 5) SEAL
Fixing to metal battens up to 1.5mm or softwood.
SUHC8620251



SDM CLAD
10-16x16 Hex B8 (Cat 5) SEAL
Fixing to purlins from 1.0-4.5mm thick.
SMHC8100161



Type 17 CLAD
12-11x25 Hex B8 (Cat 5) SEAL
Fixing Square Rib Profiles to softwood or hardwood.
STHC8120251



Vortex™ Valley Fix universal screw
5.4-13x25 Hex B8 (Cat 5) SEAL
Fixing Corri to metal battens up to 1.5mm or softwood.
SUHC8480251



SDM CLAD
10-16x25 Hex B8 (Cat 5) SEAL
Fixing Square Rib Roofing Profiles to purlins
from 1.0-4.5mm thick. SMHC8100251

**CYCLONIC
ROOFING –
CORRUGATED
SHEETING
PROFILE**

**CORRUGATED
ROOF WITH
SEAL**

**CORRUGATED
ROOF PROFILED
PLATE**


**CORRUGATED
ROOF
BRA**

**CYCLONIC
ROOFING –
CORRUGATED
SHEETING
PROFILE**

**CORRUGATED
ROOF WITH
SEAL**

**CORRUGATED
ROOF PROFILED
PLATE**

**CORRUGATED
ROOF BRA**



TO TIMBER



Hex Head Type 17

14g x 50mm Hex B8 (Cat 5) SEAL
Fixing to softwood or hardwood in high wind areas.
STHC8140501



Region D Type 17

14-10x50 Hex B8 (Cat 5)
Fixing to softwood or hardwood
in high wind areas.
STHC814050R



BRA Type 17

14-10 x 50 Hex B8 (Cat 5) BRA
Fixing to softwood and hardwood in high wind
areas.
STHC814050D



Hex Head Type 17

14g x 65mm Hex B8 (Cat 5) SEAL
Fixing to softwood or hardwood in high wind areas.
STHC8140651




Region D Type 17

14g x 65mm Hex B8 (Cat 5)
Fixing to softwood or hardwood in high
wind areas. STHC814065R



BRA Type 17

14g x 65mm Hex B8 (Cat 5) BRA
Fixing to softwood and hardwood in high wind
areas. STHC814065D

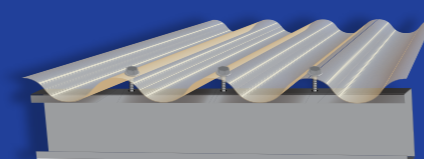

TO PURLIN



Hex Head SDM

14g x 55mm Hex B8 (Cat 5) SEAL
Fixing to purlin from 1.0-5.5mm in high wind
areas.
SMHC8140501



Region D SDM

14-10 x 55 Hex B8 (Cat 5)
Fixing to purlin from 1.0-5.5mm in high wind
areas.
SMHC814055R



SDM BRA

14 x55mm Hex B8 (Cat 5) BRA
Fixing to purlin from 1.0-5.5mm in high wind
areas.
SMHC814050D



Hex Head SDM

14g x 65mm Hex B8 (Cat 5) SEAL
Fixing to purlin from 1.0-5.5mm in high wind
areas.
SMHC8140651




Region D SDM

14g x 65mm Hex B8 (Cat 5)
Fixing to purlin from 1.0-5.5mm in high wind
areas.
SMHC814065R



SDM BRA

14g x 65mm Hex B8 (Cat 5) BRA
Fixing to purlin from 1.0-5.5mm in high wind
areas.
SMHC814065D

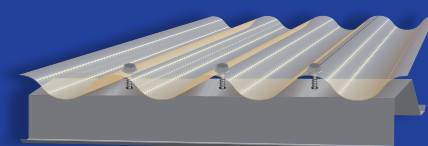

TO TOPHAT



Vortex™ ROOF universal screw

6.2-13 x 50 Hex B8 (Cat 5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood
in high wind areas.
SUHT8620501



Region D Vortex

6.2-13 x 55 Hex B8 (Cat 5)
Fixing to softwood and metal
battens up to 1.5mm in high wind areas.
SUHC862055R



BRA Vortex

6.2-13 x 55 Hex B8 (Cat 5) BRA
Fixing to softwood and metal battens up to 1.5mm
in high wind areas.
SUHC862055D

CYCLONIC ROOFING – SQUARE RIB SHEETING PROFILE

SQUARE RIB ROOF WITH SEAL

SQUARE RIB ROOF PROFILED PLATE

SQUARE RIB ROOF BRA

CYCLONIC ROOFING – SQUARE RIB SHEETING PROFILE

SQUARE RIB ROOF WITH SEAL

SQUARE RIB ROOF PROFILED PLATE

SQUARE RIB ROOF BRA



TO TIMBER




Hex Head Type 17
14g x 65mm Hex B8 (Cat 5) SEAL
Fixing to softwood or hardwood in high wind areas.
STHC8140651



Region D Type 17
14g x 65mm Hex B8 (Cat 5)
Fixing to softwood or hardwood in high wind areas.
STHC814065R



BRA Type 17
14g x 65mm Hex B8 (Cat 5) BRA
Fixing to softwood or hardwood in high wind areas.
STHC814065D

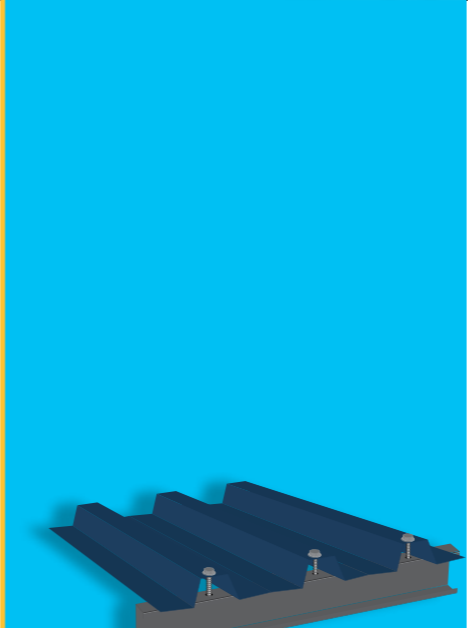

TO PURLIN




Hex Head SDM
14g x 55mm Hex B8 (Cat 5) SEAL
Fixing to purlin from 1.0-5.5mm in high wind areas.
SMHC8140501



Region D SDM
14-10 x 55 Hex B8 (Cat 5)
Fixing to purlin from 1.0-5.5mm in high wind areas.
SMHC814055R



SDM BRA
14 x 55mm Hex B8 (Cat 5) BRA
Fixing to purlin from 1.0-5.5mm in high wind areas.
SMHC814050D

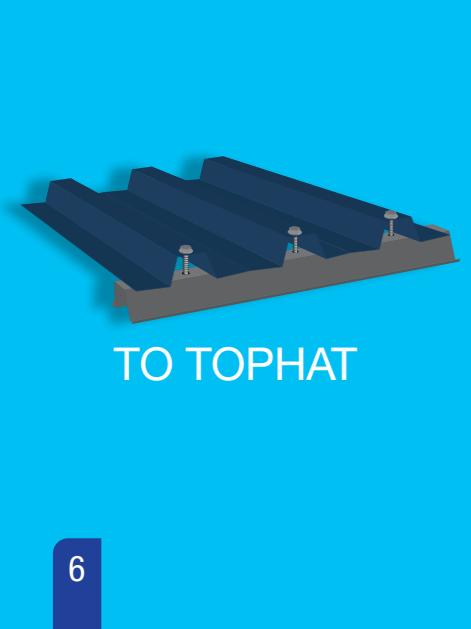

TO TOPHAT



Vortex™ ROOF universal screw
6.2-13 x 65 Hex B8 (Cat 5) Top Grip™
Fixing to metal battens up to 1.5mm or softwood.
SUHT8620651



Region D Vortex
6.2-13 x 65 Hex B8 (Cat 5)
Fixing to softwood and metal battens up to 1.5mm in high wind areas.
SUHC862065R




BRA Vortex
6.2-13 x 65 Hex B8 (Cat 5)
Fixing to softwood and metal battens up to 1.5mm in high wind areas.
SUHC862065D



Hex Head SDM
14g x 65mm Hex B8 (Cat 5) SEAL
Fixing to purlin from 1.0-5.5mm in high wind areas.
SMHC8140651




Region D SDM
14g x 65mm Hex B8 (Cat 5)
Fixing to purlin from 1.0-5.5mm in high wind areas.
SMHC814065R

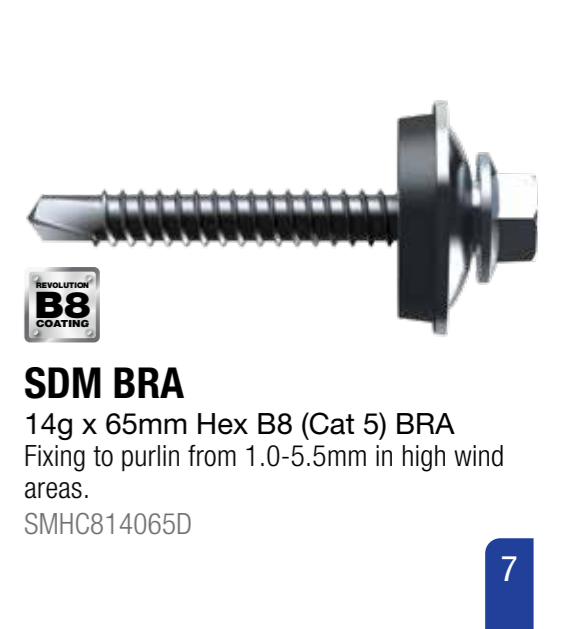


SDM BRA
14g x 65mm Hex B8 (Cat 5) BRA
Fixing to purlin from 1.0-5.5mm in high wind areas.
SMHC814065D


CYCLONIC WALLING – CORRUGATED PROFILE

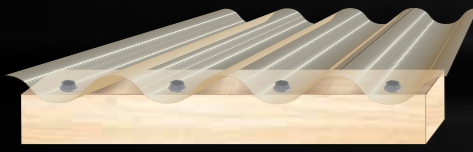

TO TIMBER

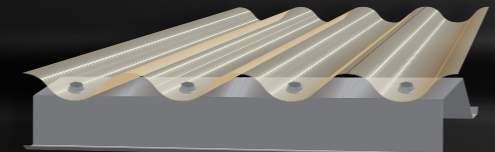


TO TOPHAT

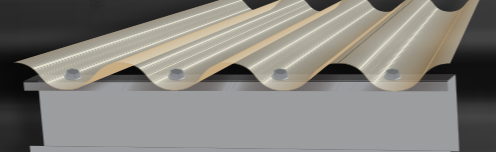


TO PURLIN


CYCLONIC WALLING – SQUARE RIB PROFILE

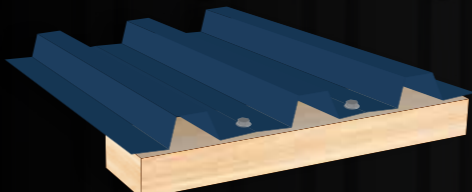

TO TIMBER

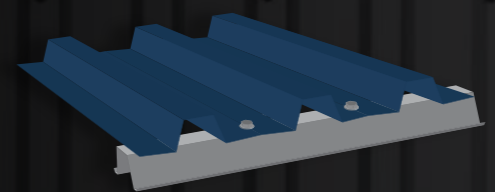


TO TOPHAT

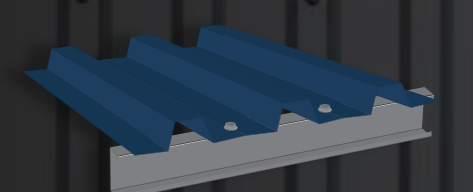


TO PURLIN

WALLING VALLEY FIXED

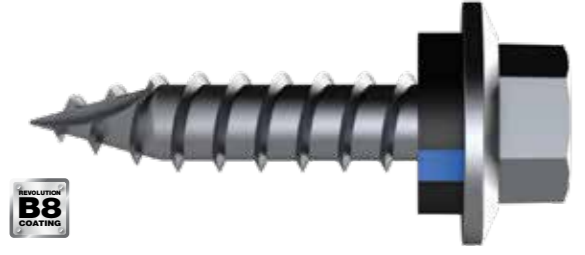

Type 17 Hex Head
 14 x 25 Hex B8 (Cat 5) SEAL
 Fixing to metal batten up to 1.5mm or softwood.
 STHC8140251

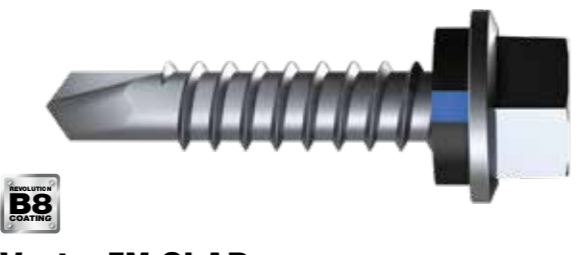


Vortex™ CLAD universal screw
 6.2-13 x 25 Hex B8 (Cat 5) SEAL
 Fixing to metal batten up to 1.5mm or softwood.
 SUHC8620251




SDM
 14 x 25 Hex B8 (Cat 5) SEAL
 Fixing to purlins from 1.0-5.5mm.
 SMHC8140251


WALLING VALLEY FIXED

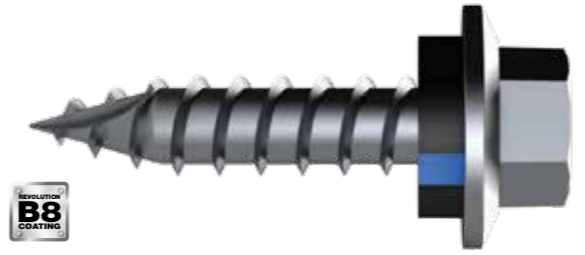

Type 17 Hex Head
 14 x 25 Hex B8 (Cat 5) SEAL
 Fixing to metal batten up to 1.5mm or softwood.
 STHC8140251

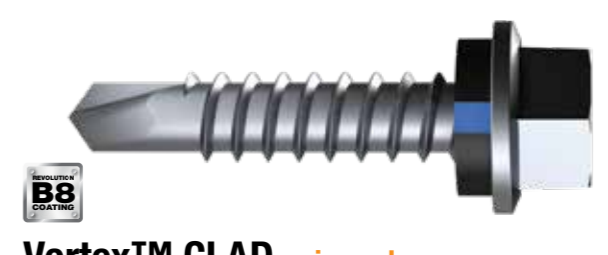

Vortex™ CLAD universal screw
 6.2-13 x 25 Hex B8 (Cat 5) SEAL
 Fixing to metal batten up to 1.5mm or softwood.
 SUHC8620251

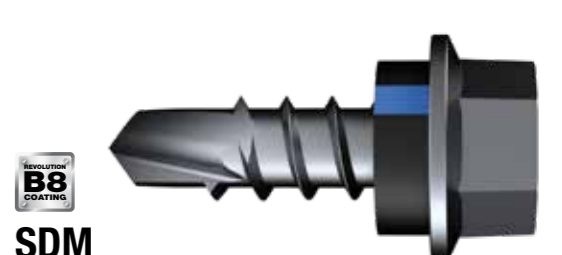






SDM
 14 x 25 Hex B8 (Cat 5) SEAL
 Fixing to purlins from 1.0-5.5mm.
 SMHC8140251

ROOFING FASTENERS COLORBOND® COLOURS

Dover White™	Surfmist®	Evening Haze/ Summershade®	Classic Cream™	Paperbark®
DW	SM	SS	CC	PA
Dune®	Southerly®	Shale Grey™	Bluegum®	Windspray®
DU	SO	SH	BM	WS
Gully™	Jasper™	Wallaby®	Basalt®	Woodland Grey®
GY	JA	WA	BZ	WG
Monument®	Night Sky®	Ironstone®	Deep Ocean®	Cottage Green®
MO	NS	IS	DO	CO
Pale Eucalypt®	Manor Red®			
PE	MN			

BREMICK CORROSION PROTECTION WARRANTY AUSTRALIA

June 2023

ENVIRONMENTAL CONDITIONS	WARRANTY PERIOD		
	ARMOURCOAT™ 3 AS 3566 Class 3	ARMOURCOAT™ 4 AS 3566 Class 4	REVOLUTION B8 AS 3566 Class 4
 MILD URBAN/RURAL (ISO 9223 CATEGORY 2) Most areas of Australia & NZ beyond 50km from the sea but can be as close as 1km from seas that are relatively sheltered.	10 YEARS	20 YEARS	30 YEARS
 MILD/MODERATE MARINE, MODERATE INDUSTRIAL (ISO 9223 CATEGORY 3) Coastal areas with low salinity, urban and industrial areas with low pollution, varies significantly with factors such as winds, topography and vegetation.	10 YEARS	20 YEARS	25 YEARS
 SEVERE MARINE (ISO 9223 CATEGORY 4) Occurs mainly on the coast in areas with rough seas and surf it extends from several hundred metres to 1km inland.	NOT RECOMMENDED	15 YEARS	20 YEARS
 VERY SEVERE INDUSTRIAL (ISO 9223 CATEGORY 5*) Aggressive industrial areas.	NOT RECOMMENDED	NOT RECOMMENDED	15 YEARS
 VERY SEVERE MARINE (ISO 9223 CATEGORY 5*) C5 zones are characterised by salt in the air but not impacted by salt spray /mist. Typically the distance from the shoreline for C5 zones are: <ul style="list-style-type: none"> • 50m to 500m inland from the shoreline of breaking surf or rough seas and areas exposed ocean spray • 100m to 500m inland from open expanses of water exposed to onshore winds, but not typically prone to breaking surf • Up to 50m inland from calm or protected areas of salt or brackish water, including ports, harbours, bays and river estuaries 	NOT RECOMMENDED	NOT RECOMMENDED	10 YEARS

Due to changes in the Consumer Warranty Laws, Bremick has aligned the warranty period for its products to be consistent with the warranty period of the major roofing material suppliers. AS3566.2 Outdoor Exposure testing results indicate the lifespan of our products to extend beyond the warranty period.

Assessment of environmental conditions to be in accordance with ISO 9223. ISO 9223 Category CX ("Extreme Marine" Corrosion zones) are characterised by ocean spray /mist and can extend up approximately 100-150m inland. When building in Category CX zones, normally Aluminium or Stainless Steel cladding materials are recommended which require the use of Stainless Steel fixings. Please consult your local Bremick representative for further advice on warranties and the most suitable fastener for the application.

FOR MORE INFORMATION CALL +61 (0)2 8332 1501

BREMICK



REVOLUTIONARY PROTECTION & DRILLING PERFORMANCE



2X
PROTECTION

MORE THAN DOUBLE the Corrosion protection of conventional Class 4 in category 5 environments.

8X
TOUGHER

Than conventional Class 4 Extremely abrasion resistant. Minimal coating loss during installation.

30%
FASTER
DRILLING

Than conventional Class 4

CORROSION PROTECTION

More than double the Corrosion protection of conventional Class 4. Suitable for Very Severe corrosive environments (ISO 9223 Category 5).

WARRANTY

Fully warranted for ISO Category 5 Very Severe Environments.

DRILL DRIVE PERFORMANCE

30% Faster than conventional Class 4.

DURABILITY

Eight times tougher than conventional Class 4. Extremely abrasion resistant. Minimal coating loss during installation.

APPEARANCE


Smoother, finer & matched to ZINCALUME®.

CONFORMANCE

Exceeds AS 3566 Class 4.

COMPATIBILITY

COLORBOND® Steel & Ultra Steel, ZINCALUME®, Steel, Galvanized & Zinc coated products, ACQ & treated timber.

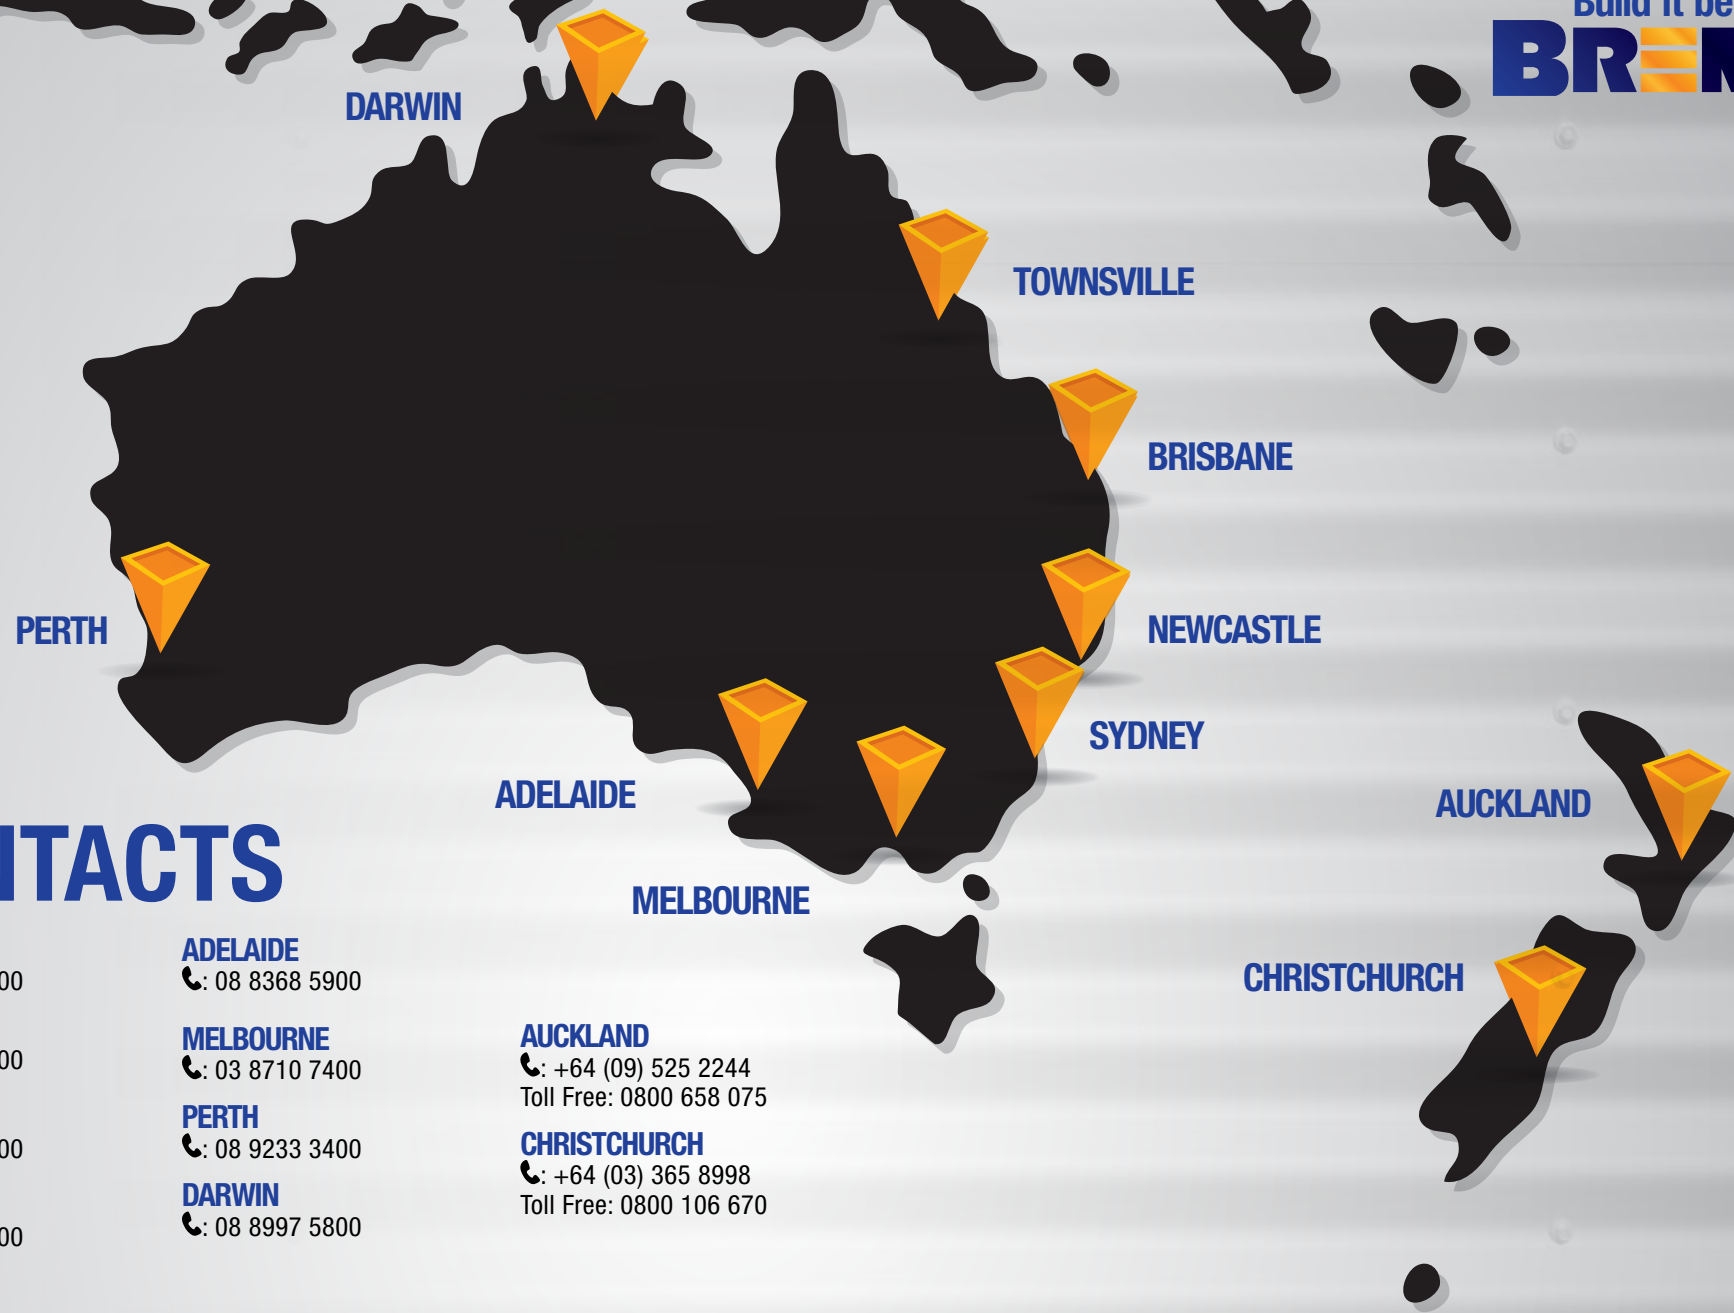

CONTACTS

SYDNEY

☎: 02 8332 1500

NEWCASTLE

☎: 02 4014 0400

BRISBANE

☎: 07 3273 9700

TOWNSVILLE

☎: 07 4729 4900

ADELAIDE

☎: 08 8368 5900

MELBOURNE

☎: 03 8710 7400

PERTH

☎: 08 9233 3400

DARWIN

☎: 08 8997 5800

AUCKLAND

☎: +64 (09) 525 2244
Toll Free: 0800 658 075

CHRISTCHURCH

☎: +64 (03) 365 8998
Toll Free: 0800 106 670

DISCLAIMER, WARRANTIES AND LIMITATION OF LIABILITY

This publication is intended to be an aid for all trades and distributors involved with the installing or distributing of Bremick products.

Except to the extent to which liability may not lawfully be excluded or limited, Bremick Pty Ltd will not be under or incur any liability to you for any direct or indirect loss or damage however caused, which you may suffer or incur in connection with this publication.

Bremick advises that the relevant Roofing and Cladding sheeting manufacturers design and installation manuals be adhered to and a suitable product from our range be selected.