

NON SAFETY CRITICAL

SLEEVE ANCHOR

6.5mm - 20mm sizes

Zinc Plated
Dry, internal applications


FEATURES & BENEFITS

- Light to medium duty expansion anchor.
- Convenient through fixture fastening.
- Load immediately after installing.
- A wide range of head styles, accomodating a wide range of applications.


APPLICATIONS/TRADES

- Light to medium load applications into solid brick & block.
- Fixing of signs, gates, handles, grab rails.
- Suspending light fixtures, pipe brackets.
- Shelving unti tie down.


SUBSTRATE SUITABILITY



UNCRACKED
CONCRETE




SOLID
BRICK



SOLID
BLOCK



NATURAL
STONE

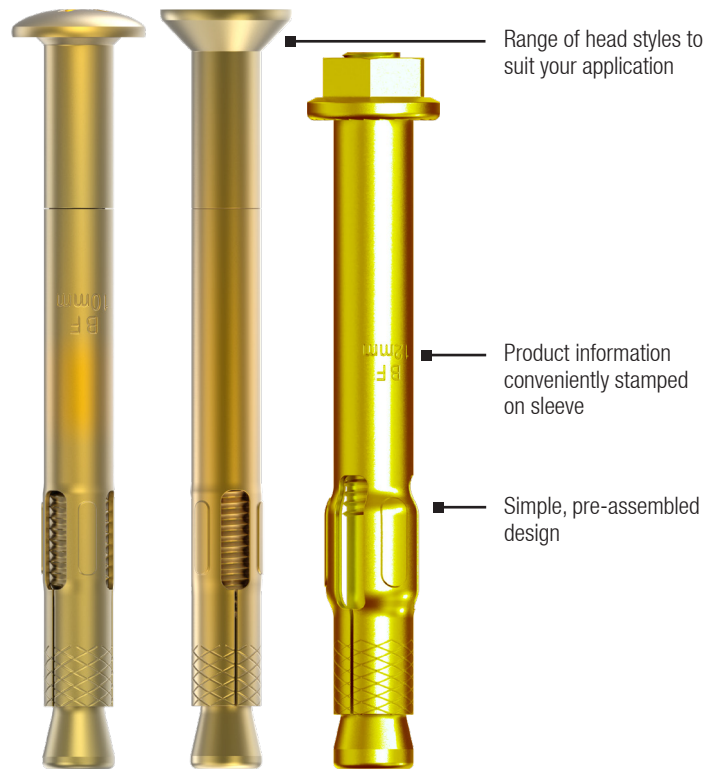

SLEEVE ANCHOR

NON SAFETY CRITICAL

RANGE



HEXAGONAL FLANGE NUT HEAD

Product Code	Pack Qty	Anchor/ Drill hole Ø (mm)	Thread size	Anchor length (mm)	Maximum fixture thickness (mm)	Drill hole depth (mm) @ $t_{fix, max}$	Minimum embedment depth (mm) @ $t_{fix, max}$	Fixture clearance hole Ø (mm)
				l_t	$t_{fix, max}$	h_1	h_{nom}	d_f
ASNMZ060252	100	6.5	M5	25	3	35	22	8
ASNMZ060352	100	6.5	M5	35	5	40	30	8
ASNMZ060552	100	6.5	M5	55	20	45	35	8
ASNMZ060752	100	6.5	M5	75	40	40	35	8
ASNMZ080402	100	8	M6	40	5	45	35	10
ASNMZ080652	100	8	M6	65	25	50	40	10
ASNMZ080852	50	8	M6	85	45	50	40	10
ASNMZ100402	50	10	M8	40	5	45	35	12
ASNMZ100502	50	10	M8	50	5	55	45	12
ASNMZ100602	50	10	M8	60	10	60	50	12
ASNMZ100752	50	10	M8	75	25	60	50	12
ASNMZ101002	25	10	M8	100	50	60	50	12
ASNMZ101252	25	10	M8	125	75	60	50	12
ASNMZ120602	25	12	M10	60	5	70	55	14
ASNMZ120752	25	12	M10	75	15	75	60	14
ASNMZ121002	20	12	M10	100	40	75	60	14
ASNMZ121302	20	12	M10	130	70	75	60	14
ASNMZ160652	20	16	M12	65	5	95	60	18
ASNMZ161102	10	16	M12	110	30	95	80	18
ASNMZ161452	10	16	M12	145	65	95	80	18
ASNMZ200752	10	20	M16	75	5	90	70	22
ASNMZ201052	5	20	M16	105	10	115	95	22
ASNMZ201152	5	20	M16	115	15	120	100	22
ASNMZ201502	5	20	M16	150	50	120	100	22
ASNMZ201602	5	20	M16	160	60	120	100	22

Note: For a fixture thickness (t_{fix}) that is less than the $t_{fix, max}$ value tabled above:
 - increase both the drill hole depth (h_1) & concrete thickness (h_{min}) by ($t_{fix, max} - t_{fix}$ actual)

SLEEVE ANCHOR

NON SAFETY CRITICAL

RANGE



COUNTERSUNK HEAD

Product Code	Pack Qty	Anchor/ Drill hole Ø (mm)	Thread size	Anchor length (mm)	Maximum fixture thickness (mm)	Drill hole depth (mm) @ t _{fix, max}	Minimum embedment depth (mm) @ t _{fix, max}	Fixture clearance hole Ø (mm)
				l _t	t _{fix, max}	h ₁	h _{nom}	d _f
ASKMZ060352	100	6.5	M5	35	5	40	30	8
ASKMZ060552	100	6.5	M5	55	20	45	35	8
ASKMZ060752	100	6.5	M5	75	40	45	35	8
ASKMZ061002	100	6.5	M5	100	65	45	35	10
ASKMZ080602	100	8	M6	60	20	50	40	10
ASKMZ080852	50	8	M6	85	45	50	40	12
ASKMZ081002	50	8	M6	100	60	50	40	12
ASKMZ100752	50	10	M8	75	25	60	50	12
ASKMZ101002	50	10	M8	100	50	60	50	12
ASKMZ101252	50	10	M8	125	75	60	50	14

RANGE



HEXAGONAL FLUSH HEAD

Product Code	Pack Qty	Anchor/ Drill hole Ø (mm)	Thread size	Anchor length (mm)	Maximum fixture thickness (mm)	Drill hole depth (mm) @ t _{fix, max}	Minimum embedment depth (mm) @ t _{fix, max}	Fixture clearance hole Ø (mm)
				l _t	t _{fix, max}	h ₁	h _{nom}	d _f
ASFMZ080452	50	8	M6	45	5	50	40	10
ASFMZ080702	50	8	M6	70	30	50	40	10
ASFMZ080902	50	8	M6	90	50	50	40	10
ASFMZ100452	50	10	M8	45	5	50	40	12
ASFMZ100552	50	10	M8	55	5	60	50	12
ASFMZ100652	50	10	M8	65	15	60	50	12
ASFMZ100802	50	10	M8	80	30	60	50	12
ASFMZ101002	50	10	M8	100	50	60	50	12
ASFMZ120652	50	12	M10	65	5	75	60	14
ASFMZ120802	25	12	M10	80	20	75	60	14
ASFMZ121002	25	12	M10	100	40	75	60	14
ASFMZ160752	20	16	M12	75	5	85	70	18
ASFMZ161102	20	16	M12	110	30	95	80	18

SLEEVE ANCHOR

NON SAFETY CRITICAL


RANGE




ROUND HEAD

Product Code	Pack Qty	Anchor/ Drill hole Ø (mm)	Thread size	Anchor length (mm)	Maximum fixture thickness (mm)	Drill hole depth (mm) @ $t_{fix, max}$	Minimum embedment depth (mm) @ $t_{fix, max}$	Fixture clearance hole Ø (mm)
				l_t	$t_{fix, max}$	h_1	h_{nom}	d_f
ASRMZ060352	100	6.5	M5	35	3	45	32	8
ASRMZ060502	100	6.5	M5	50	15	45	35	8
ASRMZ060752	100	6.5	M5	75	40	45	35	8
ASRMZ060952	100	6.5	M5	95	60	45	35	8


INSTALLATION




Drill hole through fixture into substrate to the specified diameter and depth.



Clear hole of drilling debris.



Insert anchor into hole and drive until anchor is flush with the surface of the fixture.

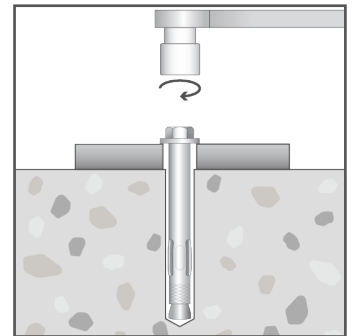

Using a wrench, expand anchor by tightening to the specified installation torque.

SLEEVE ANCHOR

NON SAFETY CRITICAL

PRODUCT INSTALL & PERFORMANCE INFORMATION

Anchor / Drill hole Ø (mm)	Minimum embedment depth	Minimum substrate thickness	Socket size AF (mm)	Installation torque (Nm)	Critical anchor spacing (mm)	Critical anchor edge distance (mm)	Recommended Capacities	
d_{nom} / d_o	h_{nom}	h_{min}	SW	T_{inst}	s_{cr}	c_{cr}	N_{rec}	V_{rec}
6.5	22	44	8	3	50	25	1.0	1.3
6.5	30	60	8	3	75	40	1.9	1.8
6.5	35	70	8	3	90	45	1.9	1.8
8	35	70	10	6	85	45	2.3	2.5
8	40	80	10	6	100	50	2.7	2.5
10	35	70	13	11	75	40	2.0	2.8
10	45	90	13	11	105	55	3.4	4.5
10	50	100	13	11	120	60	3.4	4.5
12	55	110	16	22	130	65	4.6	6.1
12	60	120	16	22	145	75	4.7	7.2
16	60	120	18	38	135	70	4.8	7.1
16	80	160	18	38	195	100	7.3	10.5
20	70	140	24	95	150	75	5.8	8.2
20	95	190	24	95	225	115	9.9	15.7
20	100	200	24	95	240	120	9.9	16.7

- Note: Recommended capacities are based on:
- Single anchor.
 - Critical anchor spacing and edge distance values.
 - 20MPa concrete compressive strength.
 - (Characteristic ultimate concrete capacities / 3) & (characteristic ultimate steel capacities / 2.5).
 - Shear load directed away from concrete edge.
 - For combined load cases (tension & shear) - must also comply with $(N_{app} / N_{rec}) + (V_{app} / V_{rec}) \leq 1.2$.

Important Disclaimer: Capacity information is limited to the simple scope above and is provided to enable a relative comparison within and across product ranges. Please contact Bremick to enable an anchoring solution to be optimised for your particular anchoring application.